


# N2.10

## Specifications

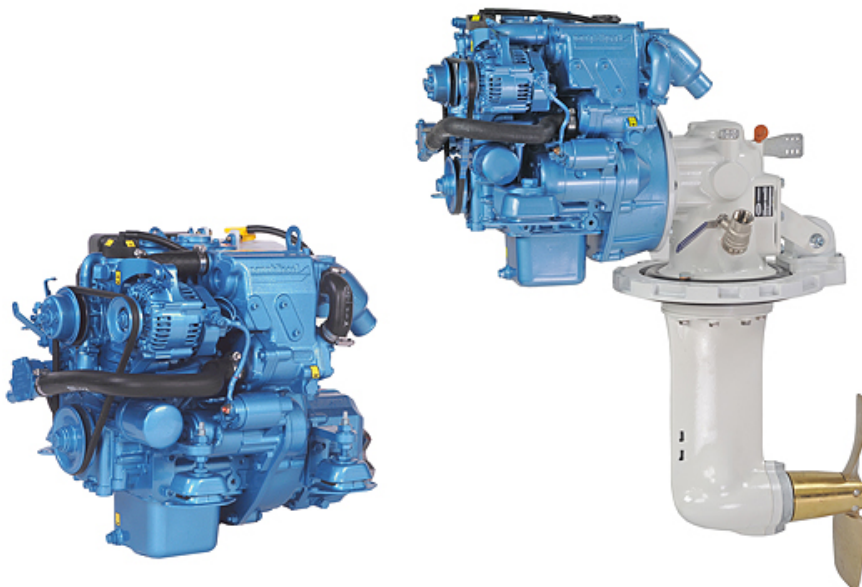

<b>Power at crankshaft</b>	7.36 kW [10 hp]
<b>Displacement</b>	0.479 l [29 in <sup>3</sup> ]
<b>Configuration</b>	2 cylinders in line
<b>Operation type</b>	4 stroke Diesel
<b>Bore &amp; Stroke</b>	67 x 68 mm [2.64 x 2.68 in]
<b>Compression ratio</b>	23.5:1
<b>Rated speed</b>	3000 rpm
<b>Idle speed</b>	1050 rpm
<b>Peak torque</b>	24.4 Nm
<b>Peak torque speed</b>	2600 rpm
<b>Dry weight</b>	
with TMC40	87 kg [191 lb]
with Sail Drive SP60	123 kg [271 lb]

<b>Engine base</b>	Kubota
<b>Fuel system</b>	Mechanical indirect injection
<b>Air intake</b>	Natural
<b>Cooling</b>	Closed cooling with heat exchanger
<b>Mounting angle</b>	15° Front up 15° Front down
<b>Alternator</b>	12 Volt 40 Amp
<b>Rating</b>	M5
<b>Emission compliance</b>	EPA marine Tier 3 RCD 94/25/EC BSO 2

